


KG5065

KG-3120NFAKGP2T/US

Capacitive sensors

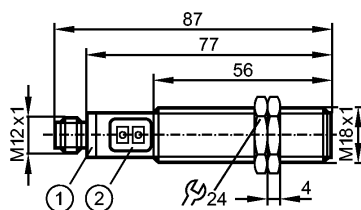

- 1: LED ring
2: Programming buttons

Made in Germany



Product characteristics

Capacitive sensor
Plastic thread M18 x 1
Connector
Teach function
Electronic lock
Automatic detection PNP/NPN *)
Sensing range 12 mm; [nf] non-flush mountable

Application

Application	For dry bulk material and liquids. Optimised for media with a dielectric constant < 20 (e.g. oils, plastic granulates).
-------------	---

Electrical data

Electrical design	DC PNP/NPN
Automatic load detection PNP/NPN	when using a resistive load < 20 kΩ
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 20
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 2.5
Current rating [mA]	200
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	10

Range

Sensing range [mm]	12
Real sensing range (Sr) [mm]	12 ± 10 %

Accuracy / deviations

Correction factors	water = 1 / glass approx. 0.4 / ceramics approx. 0.2 / PVC approx. 0.1
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-20...20

Environment

Ambient temperature [°C]	-25...80, temperature of the sensing face -25...110 °C
Target medium temperature [°C]	110

KG5065

KG-3120NFAKGP2T/US

Capacitive sensors

Protection	IP 65 / IP 67
------------	---------------

Tests / approvals

EMC	IEC 60947-5-2:	1997 + A1: 1999 + A2: 2003
MTTF	[Years]	566

Mechanical data

Mounting	non-flush mountable
Housing materials	
Weight [kg]	
	housing: PBT; connector: PC; buttons: TPE-U
	0.059



Displays / operating elements

Output status indication	LED	yellow (LED ring and connector light translucently)
--------------------------	-----	---

Electrical connection

Connection	M12 connector
------------	---------------

Wiring



Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Remarks	*) load resistance < 20 kΩ	
Pack quantity	[piece]	1